

TO-220-3L Plastic-Encapsulate MOSFETS

CJP08N65 N-Channel Power MOSFET


$V_{(BR)DSS}$	$R_{DS(on)}$ TYP	I_D
650V	1.1 Ω @10V	8A

GENERAL DESCRIPTION

This advanced high voltage MOSFET is designed to stand high energy in the avalanche mode and switch efficiently. This new recovery time. Designed for high voltage, high speed switching high energy device also offers a drain-to-source diode fast applications such as power supplies, converters, power motor controls and bridge circuits.

TO-220-3L


1. GATE
2. DRAIN
3. SOURCE



FEATURE


- High Current Rating
- Lower $R_{DS(on)}$
- Lower Capacitance
- Lower Total Gate Charge
- Tighter V_{SD} Specifications
- Avalanche Energy Specified

MARKING



P08N65= Device code
Solid dot = Green molding compound device,
if none, the normal device
XXX=Code

EQUIVALENT CIRCUIT



Maximum ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	650	V
Gate-Source Voltage	V_{GS}	± 30	
Continuous Drain Current	I_D	8	A
Pulsed Drain Current	I_{DM}	32	
Single Pulsed Avalanche Energy (note1)	E_{AS}	250	mJ
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	62.5	$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 ~ +150	$^\circ\text{C}$
Maximum Lead Temperature for Soldering Purposes , Duration for 5 Seconds	T_L	260	

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^{\circ}\text{C}$ unless otherwise specified


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =250μA	650			V
Drain-source diode forward voltage	V _{SD}	V _{GS} = 0V, I _S =8A			1.4	
Zero gate voltage drain current	I _{DSS}	V _{DS} =650V, V _{GS} =0V			10	μA
Gate-body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =± 30V			±100	nA
On characteristics (note2)						
Gate-threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	2.0	3.5	4.0	V
Static drain-source on-resistance	R _{DS(on)}	V _{GS} =10V, I _D =4A		1.1	1.4	Ω
Forward transconductance	g _{fs}	V _{DS} =50V, I _D =3.9A		8.5		S
Dynamic characteristics (note 3)						
Input capacitance	C _{iss}	V _{DS} =25V,V _{GS} =0V,f =1MHz			1255	pF
Output capacitance	C _{oss}				135	
Reverse transfer capacitance	C _{rss}				16	
Switching characteristics (note 3)						
Total gate charge	Q _g	V _{DS} =520V,V _{GS} =10V,I _D =8A		28	36	nC
Gate-source charge	Q _{gs}			4.5		
Gate-drain charge	Q _{gd}			12		
Turn-on delay time	t _{d(on)}	V _{DD} =325V, R _G =25Ω, I _D =8A			45	ns
Turn-on rise time	t _r				130	
Turn-off delay time	t _{d(off)}				170	
Turn-off fall time	t _f				140	

Notes :


1. $L=7mH, I_L=8A, V_{DD}=50V, R_G=25\Omega$, Starting $T_J=25^{\circ}\text{C}$.
2. Pulse Test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. These parameters have no way to verify.

Typical Characteristics


Output Characteristics

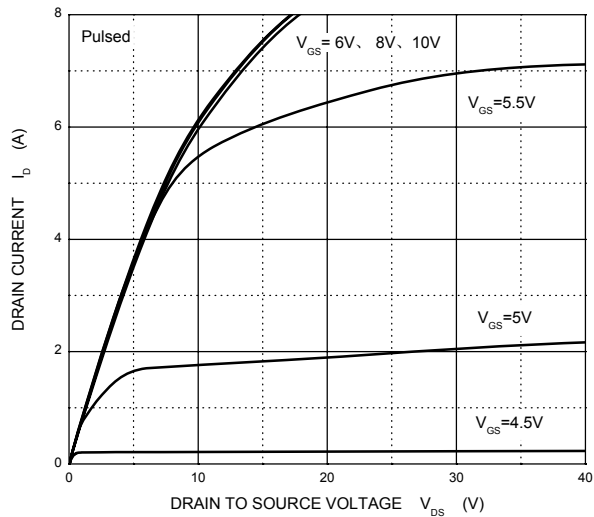


Transfer Characteristics

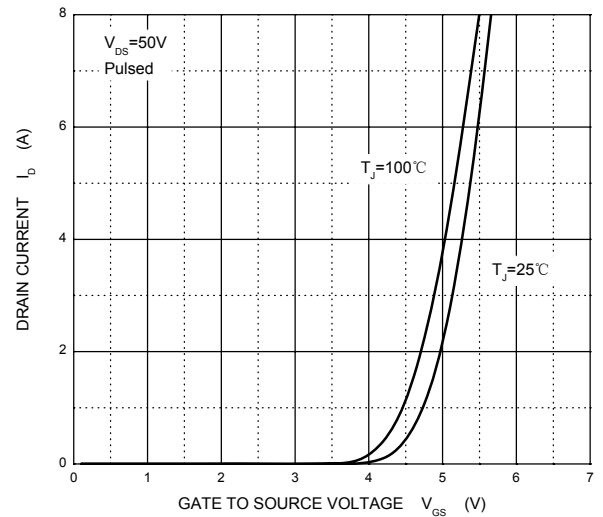


$R_{DS(ON)}$ — I_D

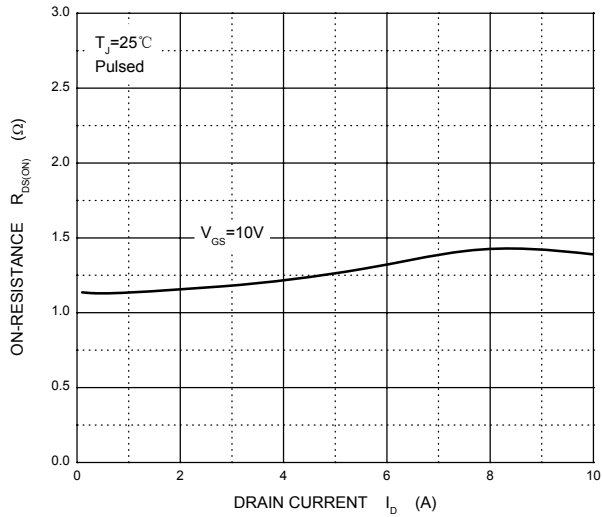


$R_{DS(ON)}$ — V_{GS}

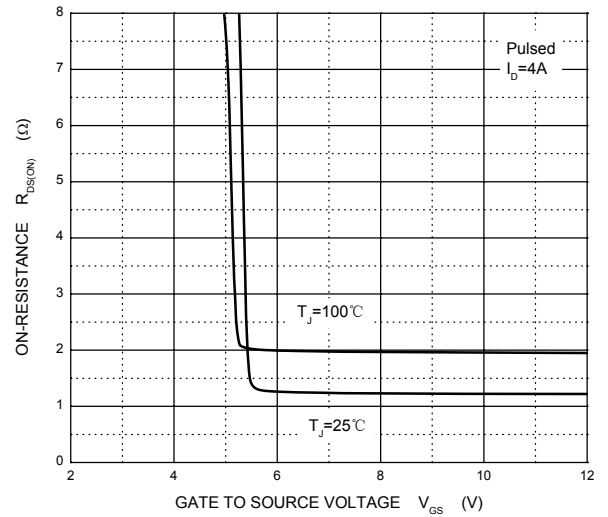


I_S — V_{SD}

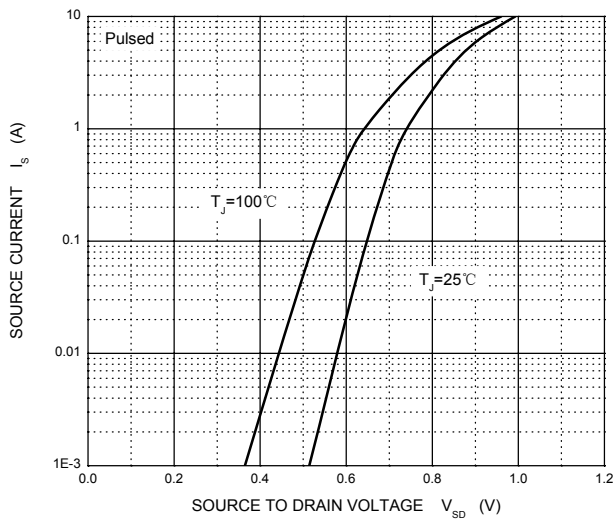

Threshold Voltage

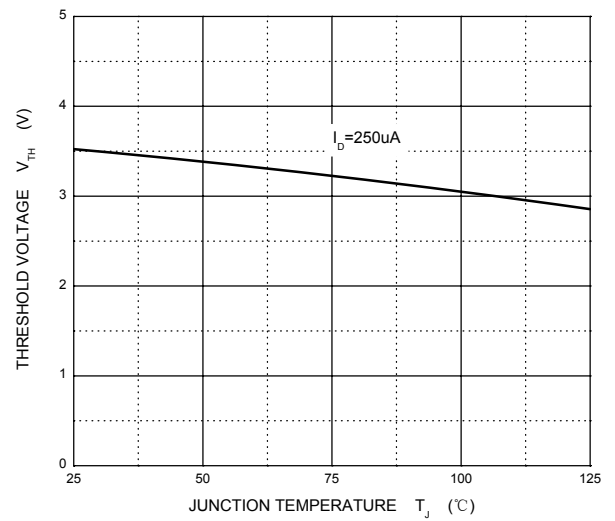

TO-220-3L Package Outline Dimensions

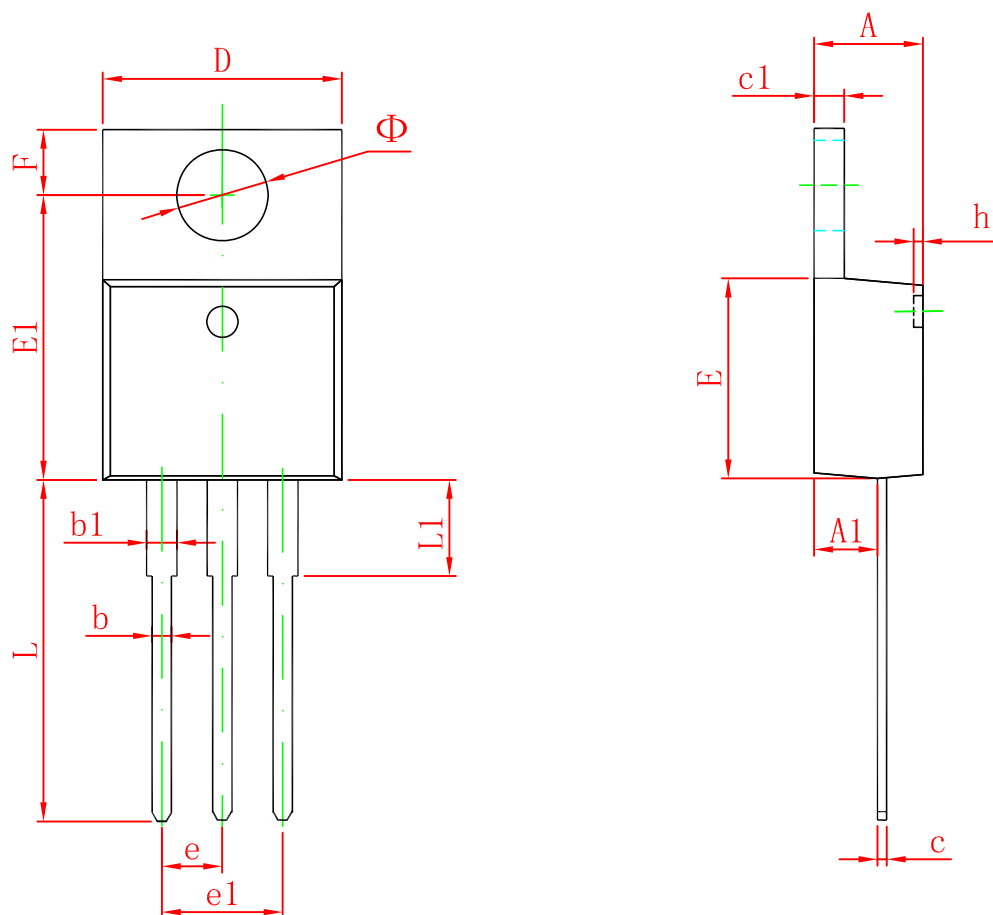

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
Φ	3.735	3.935	0.147	0.155